




Geräte zum Schweißen Schneiden und Erhitzen

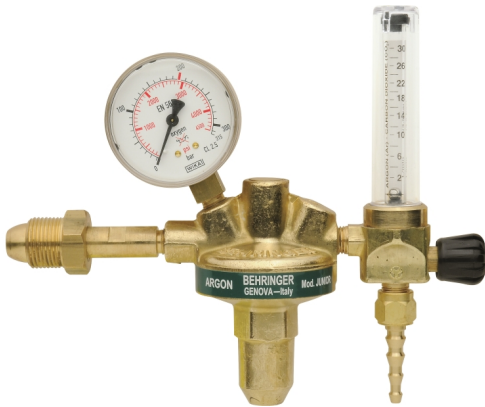

JUNIOR cylinder pressure regulator with flowmeter

Produktbeschreibung

Cylinder pressure regulator with pressure gauge to show High Pressure, and flowmeter on outlet to show flow; used to reduce the pressure down to that of the line or equipment. Max. inlet pressure 200 bar. Outlet pressure 4 bar. Gas specific inlet connection. The outlet is fitted with an \varnothing 4-6/6 mm hose connector.

Normen

UNI EN ISO 2503 | UNI EN ISO 5171 | UNI EN ISO 9539

Komponenten

Connection, body, cap and overpressure discharge valve integrated in the pressure regulator, made of CW614N brass.

No.1 gas-specific inlet.

No.1 0-30 L/min flowmeter on the outlet with a \varnothing 6 mm hose connector.

No.1 0-315 bar inlet pressure gauge, \varnothing 63 mm, class 2.5.

Stainless steel springs.

NBR membrane.

TEFLON seal seat.

NBR o-ring.

NYLON gaskets.

Wartungskit

CODE	DESCRIPTION
CK009A	MAINTENANCE EQ JUNIOR FLUX/MANOFLEX PRESSURE REDUCER

Technische Daten

CODE	Q max.	P ₁ max.	P ₂ max.	INLET CONNECTION	OUTLET CONNECTION	WEIGHT
C7170BT	30 l/min	200 bar	4 bar	W21,7x1/14" 'A'	Ø 4-6/6 mm hose connector	1,5 kg
C7200AS	30 l/min	200 bar	4 bar	W24,5x1/14" 'B'	Ø 4-6/6 mm hose connector	1,5 kg
C7202	30 l/min	200 bar	4 bar	W21,8x1/14" 'A'	Ø 4-6/6 mm hose connector	1,5 kg
C7204	30 l/min	200 bar	4 bar	SI21,7x1,814" 'A'	Ø 4-6/6 mm hose connector	1,5 kg
C7206	30 l/min	200 bar	4 bar	G 5/8" 'B' BS	Ø 4-6/6 mm hose connector	1,5 kg
C7208	30 l/min	200 bar	4 bar	W21,8x1/14" 'A'	Ø 4-6/6 mm hose connector	1,5 kg
C7209	30 l/min	200 bar	4 bar	SI21,7x1,814" 'A'	Ø 4-6/6 mm hose connector	1,5 kg
C7210	30 l/min	200 bar	4 bar	0,860x14 TPI 'A'	Ø 4-6/6 mm hose connector	1,5 kg