




Geräte zum Schweißen Schneiden und Erhitzen

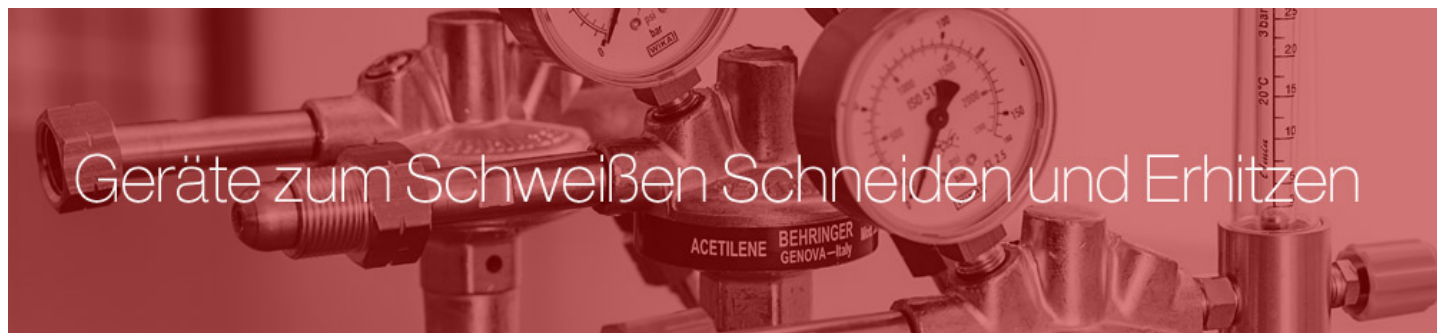

PB-NL nozzles

Produktbeschreibung

PB-NL series oxy-propane cutting nozzles used with the TN/75 cutting torch.

Normen

UNI EN ISO 9539 | UNI EN ISO 5172

Technische Daten

CODE	NOZZLES	CUTTING THICKNESS	P O ₂	Q O ₂	P C ₃ H ₈	Q C ₃ H ₈
C0338	ESTERNO PB1	3-100 mm				
C0339	ESTERNO PB2	100-300 mm				
C0340	INTERNO NL/1	3-20 mm	4,5 bar	4,9 Nm ³ /h	1,2 bar	0,6 Nm ³ /h
C0341	INTERNO NL/2	20-65 mm	4,5 bar	6,1 Nm ³ /h	1,2 bar	0,6 Nm ³ /h
C0342	INTERNO NL/3	65-100 mm	4,5 bar	7,1 Nm ³ /h	1,2 bar	0,6 Nm ³ /h
C0343	INTERNO NL/4	100-150 mm	4,5 bar	7,6 Nm ³ /h	1,2 bar	0,6 Nm ³ /h
C0344	INTERNO NL/5	150-220 mm	4,5 bar	7,8 Nm ³ /h	1,2 bar	0,7 Nm ³ /h
C0344A	INTERNO NL/6	220-300 mm	4,5 bar	8,1 Nm ³ /h	1,2 bar	0,8 Nm ³ /h