
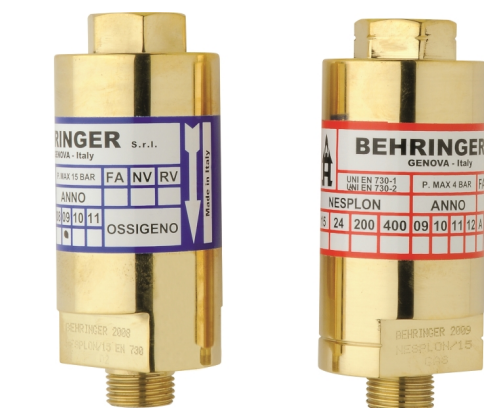


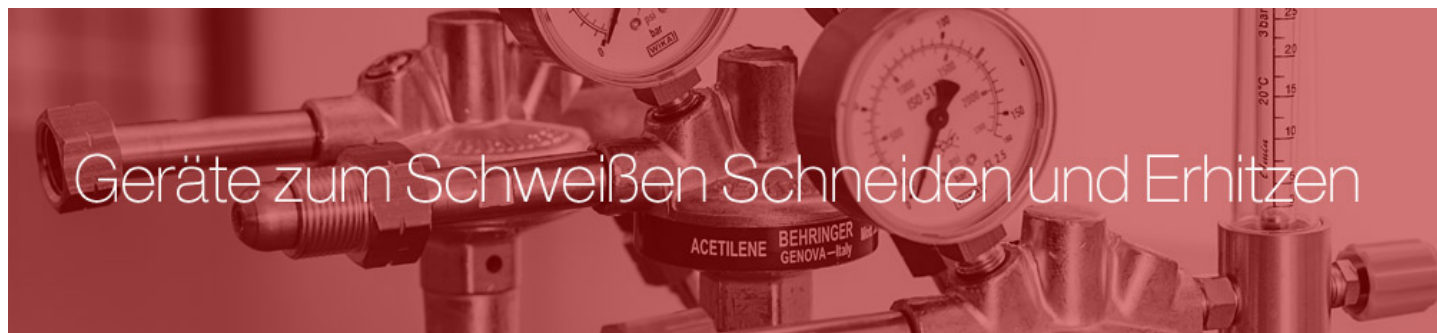

Nesplon 15

Produktbeschreibung

Nesplon 15 valves are designed to keep the end utilities of industrial gas lines safe; they're fitted with flame arrestors and gas check valves. These valves can be installed directly on the outlet of 451 pressure reducers; they're suitable for both comburent gas (oxygen) and fuel gas. We recommend a full service of the Nesplon 15 valves in the case of a flashback, after 5 years from the date of installation and in any case after the time limit of 5 years plus 1 from the manufacturing date on the valve.

Normen

UNI EN ISO 9539 | UNI EN ISO 5175-1 | UNI 11627

Komponenten

CW614N brass body and cut-off.
AISI 316 sintered stainless steel flashback arrestor filter.
Stainless steel springs.
Aluminum gaskets.
NBR O-ring.

Wartungskit

CODE	DESCRIPTION
CK013	MAINTENANCE KIT NESPLON/15 SAFETY VALVE

Technische Daten

CODE	GAS	Q max.	P max.	INLET CONNECTION	OUTLET CONNECTION
VN15G2	FUELS	149 Nm ³ /h	4 bar	G1/2" F L	G1/2" M L
VN15O2	COMBURENTS	196 Nm ³ /h	10 bar	G1/2" F R	G1/2" M R

