


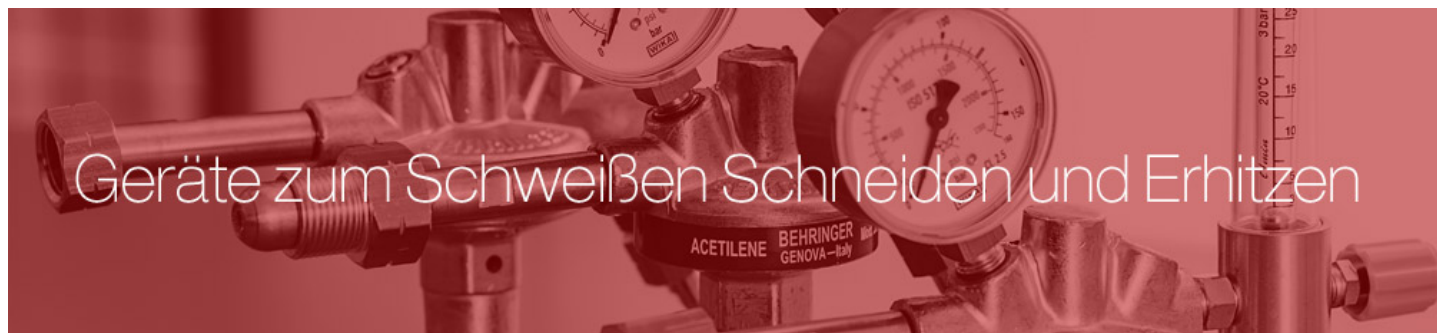

Geräte zum Schweißen Schneiden und Erhitzen

TN/75

Produktbeschreibung

TN/75 aspiration mix descaling torch with 45° head; to be used with SCM series oxyacetylene nozzles. We recommend installing suitable flashback arrestors and reverse gas flow check valves on the inlet (VI6O08 and VI6G08).



Normen

UNI EN ISO 9539 | UNI EN ISO 5172

Komponenten

- No.1 aluminum grip.
- No.3 gas taps for: oxygen, cutting oxygen and gas.
- No.2 Ø 8 mm hose connectors on the inlet.

Wartungskit

CODE	DESCRIPTION
CK002	CUTTING OXYGEN HANDLE TAP EQ
CK003	HEATING OXYGEN HANDLE TAP EQ
CK004	GAS HANDLE TAP EQ

Technische Daten

CODE	LENGTH	WEIGHT
C4160FM	460 mm	1 kg