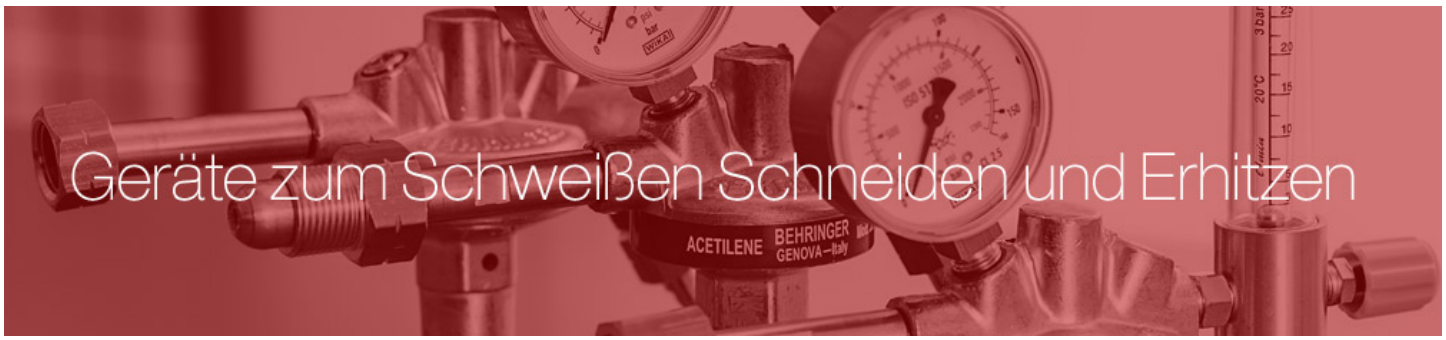

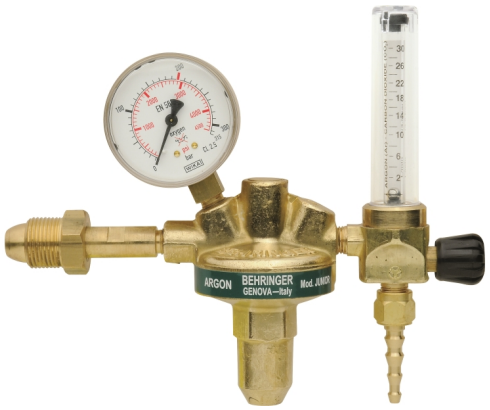

JUNIOR cylinder pressure regulator with flowmeter

Produktbeschreibung

Cylinder pressure regulator with pressure gauge to show High Pressure, and flowmeter on outlet to show flow; used to reduce the pressure down to that of the line or equipment.Max. inlet pressure 200 bar.Outlet pressure 4 bar.Gas specific inlet connection.The outlet is fitted with an Ø 4-6/6 mm hose connector.

Normen

UNI EN ISO 2503 | UNI EN ISO 5171 | UNI EN ISO 9539

Komponenten

Connection, body, cap and overpressure discharge valve integrated in the pressure regulator, made of CW614N brass.
No.1 gas-specific inlet.
No.1 0-30 L/min flowmeter on the outlet with a Ø 6 mm hose connector.
No.1 0-315 bar inlet pressure gauge, Ø 63 mm, class 2.5.
Stainless steel springs.
NBR membrane.
TEFLON seal seat.
NBR o-ring.
NYLON gaskets.

Wartungskit

CODE	DESCRIPTION
CK009A	MAINTENANCE EQ JUNIOR FLUX/MANOFLUX PRESSURE REDUCER

Behringer S.r.l. via Gualco 4, 16165 Genova ITALY
T +39 010 8309103 **F** +39 010 8309183 **e-mail** info@behringer.it **C.F.** e **P.I.** 01167840998

Technische Daten

CODE	Q max.	P_1 max.	P_2 max.	INLET CONNECTION	OUTLET CONNECTION	WEIGHT
C7170BT	30 l/min	200 bar	4 bar	W21,7x1/14" 'A'	Ø 4-6/6 mm hose connector	1,5 kg
C7200AS	30 l/min	200 bar	4 bar	W24,5x1/14" 'B'	Ø 4-6/6 mm hose connector	1,5 kg
C7202	30 l/min	200 bar	4 bar	W21,8x1/14" 'A'	Ø 4-6/6 mm hose connector	1,5 kg
C7204	30 l/min	200 bar	4 bar	SI21,7x1,814" 'A'	Ø 4-6/6 mm hose connector	1,5 kg
C7206	30 l/min	200 bar	4 bar	G 5/8" 'B' BS	Ø 4-6/6 mm hose connector	1,5 kg
C7208	30 l/min	200 bar	4 bar	W21,8x1/14" 'A'	Ø 4-6/6 mm hose connector	1,5 kg
C7209	30 l/min	200 bar	4 bar	SI21,7x1,814" 'A'	Ø 4-6/6 mm hose connector	1,5 kg
C7210	30 l/min	200 bar	4 bar	0,860x14 TPI 'A'	Ø 4-6/6 mm hose connector	1,5 kg

Behringer S.r.l. via Gualco 4, 16165 Genova ITALY
T +39 010 8309103 **F** +39 010 8309183 **e-mail** info@behringer.it **C.F.** e **P.I.** 01167840998