


# Schiffsmaschinen und Industrieanlagenbau

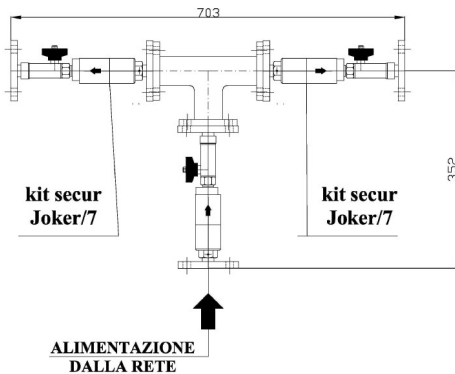

## Nesplon 24

### Produktbeschreibung

Nesplon 24 valves are designed to keep industrial gas lines or multi utility panel boards safe; they're fitted with flame arrestors and gas check valves. They can be used with comburent gas (oxygen) and fuel gas. We recommend a full service of the Nesplon 24 valves in the case of a flashback, after 5 years from the date of installation and in any case after the time limit of 5 years plus 1 from the manufacturing date on the valve.

### Normen

UNI EN ISO 9539 | UNI EN ISO 5175-1 | UNI 11627

### Komponenten

- CW614N brass body and cut-off.
- AISI 316 sintered stainless steel flashback arrestor filter.
- Stainless steel springs.
- Aluminum gaskets.
- NBR O-ring.

### Wartungskit

| CODE  | DESCRIPTION                            |
|-------|--|
| CK014 | MAINTENANCE EQ NESPLON/24 SAFETY VALVE |

### Technische Daten

| CODE   | GAS        | Q max.                 | P max. | INLET CONNECTION | OUTLET CONNECTION |
|--------|------------|------------------------|--------|------------------|-------------------|
| VN24G2 | FUELS      | 355 Nm <sup>3</sup> /h | 4 bar  | G3/4" F L        | G3/4" M L         |
| VN24O2 | COMBURENTS | 255 Nm <sup>3</sup> /h | 10 bar | G3/4" F R        | G3/4" M R         |

SCHEMA DI UTILIZZO DEL "T", KIT SICUREZZA

