
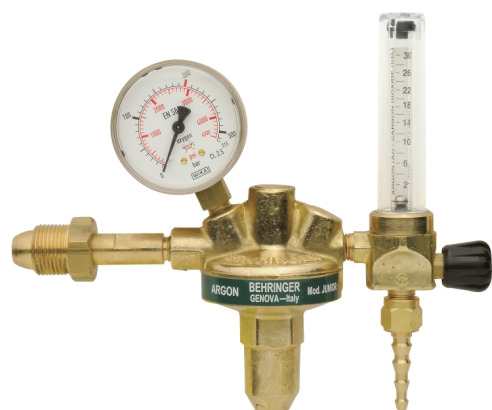


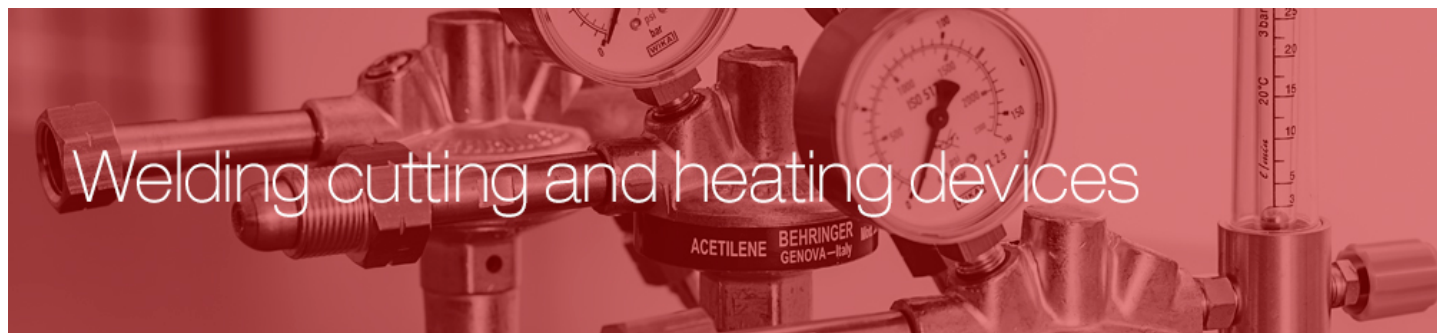

JUNIOR cylinder pressure regulator with flowmeter

Product description

Cylinder pressure regulator with pressure gauge to show High Pressure, and flowmeter on outlet to show flow; used to reduce the pressure down to that of the line or equipment. Max. inlet pressure 200 bar. Outlet pressure 4 bar. Gas specific inlet connection. The outlet is fitted with an Ø 4-6/6 mm hose connector.

Normatives

UNI EN ISO 2503 | UNI EN ISO 5171 | UNI EN ISO 9539

Components

Connection, body, cap and overpressure discharge valve integrated in the pressure regulator, made of CW614N brass.

No.1 gas-specific inlet.

No.1 0-30 L/min flowmeter on the outlet with a Ø 6 mm hose connector.

No.1 0-315 bar inlet pressure gauge, Ø 63 mm, class 2.5.

Stainless steel springs.

NBR membrane.

TEFLON seal seat.

NBR o-ring.

NYLON gaskets.

Maintenance kit

CODE	DESCRIPTION
CK009A	MAINTENANCE EQ JUNIOR FLUX/MANOFLUX PRESSURE REDUCER

Technical data

CODE	GAS	Q max.	P ₁ max.	P ₂ max.	INLET CONNECTION	OUTLET CONNECTION	WEIGHT
C7200AS	ARGON	30 l/min	200 bar	4 bar	W24,5x1/14" 'B'	Ø 4-6/6 mm hose connector	1,5 kg
C7202	CARBON DIOXIDE	30 l/min	200 bar	4 bar	W21,8x1/14" 'A'	Ø 4-6/6 mm hose connector	1,5 kg
C7204	ARGON	30 l/min	200 bar	4 bar	SI21,7x1,814" 'A'	Ø 4-6/6 mm hose connector	1,5 kg
C7206	ARGON	30 l/min	200 bar	4 bar	G 5/8" 'B' BS	Ø 4-6/6 mm hose connector	1,5 kg
C7170BT	ARGON	30 l/min	200 bar	4 bar	W21,7x1/14" 'A'	Ø 4-6/6 mm hose connector	1,5 kg
C7208	CARBON DIOXIDE	30 l/min	200 bar	4 bar	W21,8x1/14" 'A'	Ø 4-6/6 mm hose connector	1,5 kg
C7209	CARBON DIOXIDE	30 l/min	200 bar	4 bar	SI21,7x1,814" 'A'	Ø 4-6/6 mm hose connector	1,5 kg
C7210	CARBON DIOXIDE	30 l/min	200 bar	4 bar	0,860x14 TPI 'A'	Ø 4-6/6 mm hose connector	1,5 kg