


Marine and industrial plant engineering

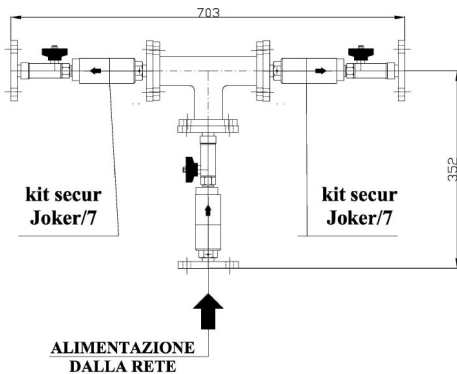

Gas distribution panel connection safety kit

Product description

The safety kit is necessary if the customer's need is to power n. 2 technical gas distribution panels in battery simultaneously. The kit easily connects with specific gas flanges. Equipped with n. 3 Nesplon 24 valves, guarantees continuity of supply without load losses and protects each panel and the distribution line that feeds it from backfire.

It is recommended that the Nesplon 24 valves are completely overhauled after each backfire, after 5 years from the date of installation and in any case after a

maximum period of 5 years plus 1 from the manufacturing date of the valve indicated on it.

Normatives

UNI EN ISO 9539 | UNI EN ISO 5175-1 | UNI 11627

Components

- CW614N brass body and cut-off.
- AISI 316 sintered stainless steel flashback arrestor filter.
- Stainless steel springs.
- Aluminum gaskets.
- NBR O-ring.

Maintenance kit

CODE	DESCRIPTION
CK014	MAINTENANCE EQ NESPLON/24 SAFETY VALVE

Technical data

CODE	DESCRIPTION	GAS
QJK005	SECURITY KIT - NESPLON/24 O2	OXYGEN
QJK006	SECURITY KIT - NESPLON/24 GAS	FUELS

SCHEMA DI UTILIZZO DEL "T", KIT SICUREZZA

