AFNOR FR socket

Organismo Notificato n. 0476
Notified Body nr. 0476

Product description

AFNOR FR socket conforming to the French standard NF S 90-116, suitable for connection to the specific AFNOR FR basic block manufactured by Behringer; easy installation; the socket constitutes the final part of the compressed gas distribution system; the device is a specific gas and incorporates a stainless steel filter.

Normatives

UNI EN ISO 9170-1 | NF S 90-116 | UNI EN ISO 15001 | FDS 90 119

Components

Body made of CW617N chemically nickel-plated brass.
Stainless steel filter.
Stainless steel springs.
EPDM PEROX O-Ring.

Maintenance kit

CODE	GAS	DESCRIPTION
HK122	O_2 - Air - N_2O - CO_2	MAINTENANCE EQ AFNOR FR DIAMETER 7
HK123V	Air-800	MAINTENANCE EQ SOCKET AFNOR FR 2019 DIAM. 6
HK124V	Vac - N_2	MAINTENANCE EQ SOCKET AFNOR FR 2019 DIAM. 8
CNFZ006	O_2 - Air - N_2O - CO_2	MAINTENANCE EQ AFNOR FR SOCKET DIAM. 7 - PACK 10 PCS
CNFZ011	Air-800	MAINTENANCE EQ SOCKET AFNOR FR 2019 DIAM. 6 - PACK 10 PCS
CNFZ012	Vac / N_2	MAINTENANCE EQ SOCKET AFNOR FR 2019 DIAM. 8 - PACK 10 PCS
HPC004	All	MAINTENANCE KEY AFNOR SOCKETS FR

Behringer S.r.l. via Gualco 4, 16165 Genova ITALY
T +39 010 8309103 **F** +39 010 8309183 **e-mail** info@behringer.it **C.F.** e **P.I.** 01167840998

Technical data

CODE	GAS	FLOW RATE	MAXIMUM PRESSURE DROP	WEIGHT
HP180	O_2	40 l/min	0,15 bar	0.12 kg
HP181	Air	40 l/min	0,15 bar	0.12 kg
HP182V	Vac	25 l/min	0,15 bar	0.12 kg
HP183	N_2O	40 l/min	0,15 bar	0.12 kg
HP184V	Air-800	350 l/min	0,70 bar	0.12 kg
HP185	CO_2	40 l/min	0,15 bar	0.12 kg
HP186V	N_2 400	40 l/min	0,15 bar	0.12 kg

Technical Images

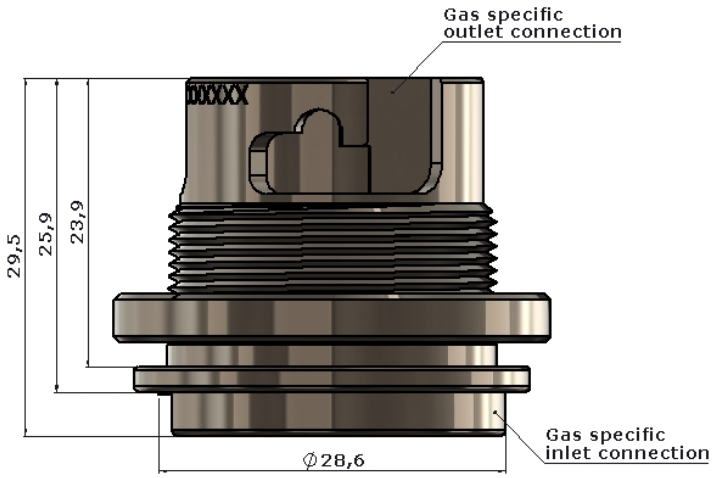

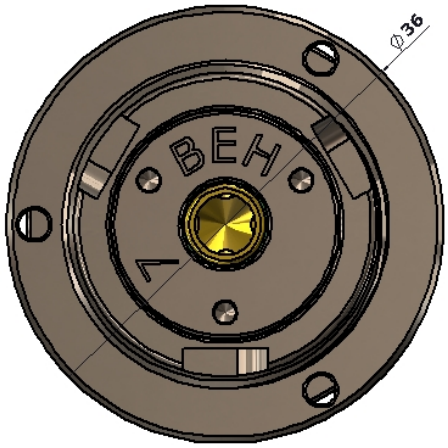

Behringer S.r.l. via Gualco 4, 16165 Genova ITALY
T +39 010 8309103 **F** +39 010 8309183 **e-mail** info@behringer.it **C.F.** e **P.I.** 01167840998