


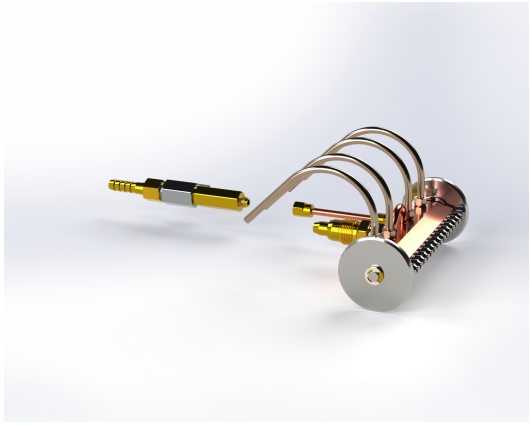

SECUR/2000

Description du produit

The SECUR line is designed for blazing slabs or flat surfaces; slabs can be positioned either vertically or horizontally.
Flaming is achieved by advancing the lance at a 45° angle. If the slab is less than 30 mm thick, it is strongly recommended to use the model with water cooling capability (code M0037H,M0037G).
The entire SECUR series uses the LEM/S universal handle (code M0007) and uses oxygen and propane gas.

Kit d'entretien


CODE	SPARES
M0043A	SMG/PM 6 MIXER
M0043B	SMG/PM 3 MIXER
C0194A	STEEL WHEEL Ø 60 mm
M0068	STAINLESS STEEL NOZZLE


Caractéristiques techniques


CODE	ITEM	P O_2	Q O_2	P C_3H_8	Q C_3H_8
M0007	LEM/S GRIP				
M0066	SECUR LANCE				
M0066H	SECUR - 30 mm COMBS	4,5 bar	4,7 Nm³/h	1,2 bar	0,8 Nm³/h
M0066I	SECUR - 50 mm COMBS	4,5 bar	7,35 Nm³/h	1,2 bar	1,3 Nm³/h
M0037H	SECUR - 100 mm COMBS	4,5 bar	9,4 Nm³/h	1,2 bar	1,4 Nm³/h
M0037G	SECUR - 150 mm COMBS	4,5 bar	11,93 Nm³/h	1,2 bar	1,5 Nm³/h


Behringer S.r.l. via Gualco 4, 16165 Genova ITALY
T +39 010 8309103 **F** +39 010 8309183 **e-mail** info@behringer.it **C.F.** e **P.I.** 01167840998


Images techniques

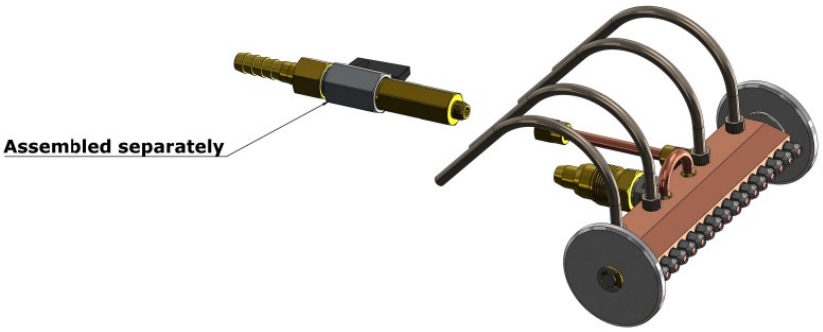



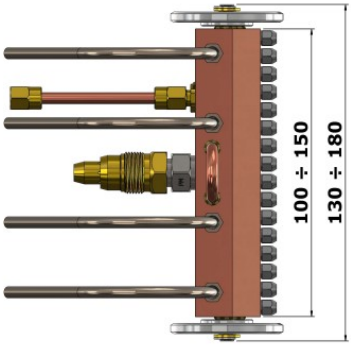



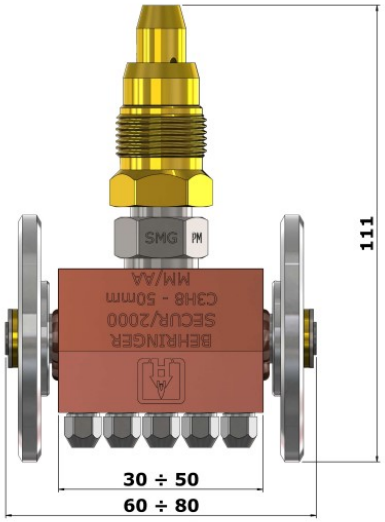

Behringer S.r.l. via Gualco 4, 16165 Genova ITALY
T +39 010 8309103 **F** +39 010 8309183 **e-mail** info@behringer.it **C.F.** e **P.I.** 01167840998