


# Dispositivos de flamejamento

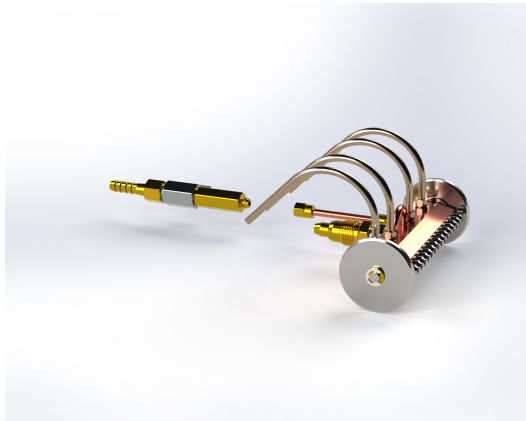

## SECUR/2000

### Descrição do produto

The SECUR line is designed for blazing slabs or flat surfaces; slabs can be positioned either vertically or horizontally.

Flaming is achieved by advancing the lance at a 45° angle. If the slab is less than 30 mm thick, it is strongly recommended to use the model with water cooling capability (code M0037H,M0037G).

The entire SECUR series uses the LEM/S universal handle (code M0007) and uses oxygen and propane gas.

### Kit de manutenção

CODE	SPARES
M0043A	SMG/PM 6 MIXER
M0043B	SMG/PM 3 MIXER
C0194A	STEEL WHEEL Ø 60 mm
M0068	STAINLESS STEEL NOZZLE

### Dados técnicos

CODE	ITEM	P O <sub>2</sub>	Q O <sub>2</sub>	P C <sub>3</sub> H <sub>8</sub>	Q C <sub>3</sub> H <sub>8</sub>
M0007	LEM/S GRIP				
M0066	SECUR LANCE				
M0066H	SECUR - 30 mm COMBS	4,5 bar	4,7 Nm <sup>3</sup> /h	1,2 bar	0,8 Nm <sup>3</sup> /h
M0066I	SECUR - 50 mm COMBS	4,5 bar	7,35 Nm <sup>3</sup> /h	1,2 bar	1,3 Nm <sup>3</sup> /h
M0037H	SECUR - 100 mm COMBS	4,5 bar	9,4 Nm <sup>3</sup> /h	1,2 bar	1,4 Nm <sup>3</sup> /h
M0037G	SECUR - 150 mm COMBS	4,5 bar	11,93 Nm <sup>3</sup> /h	1,2 bar	1,5 Nm <sup>3</sup> /h

